

COMPACT EMERGENCY CONVERSION KIT



FL 140M-EV58

Features and Application

The FL 140M-EV58 Compact Emergency Conversion Kit is designed for use in light fittings from 18 to 36 watt fluorescent lamps. With its compact size, it is versatile to be used in various environments with space constraints. It is available in compact 20 and 40 watt charger/inverter units with a highly efficient, high frequency inverter complete with stand-by battery.




PLS Listed



Class 1



Dimensions (mm)

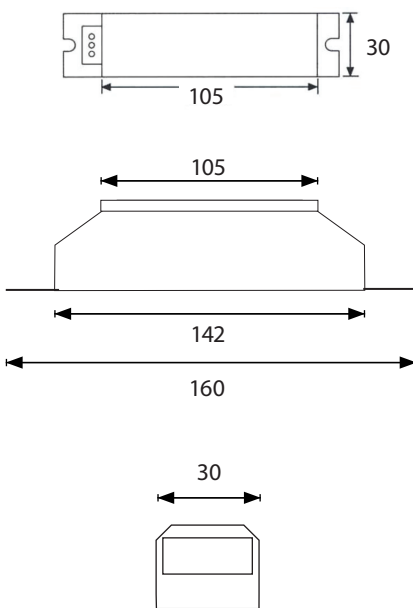

Technical Data

Mode of Operation	Maintained
Lamp	4-pin Fluorescent lamp
Operating Temperature	ta 40°C
Mains Supply	230V AC 50/60Hz
Power Consumption	3VA
Battery	Maintenance-free High Temperature Nickel Cadmium
Charger	Fully automatic
Charging Monitor	Ø 5mm Green LED
Recharge Period	24 hrs
Testing Facility	Push-off Test-switch for independent testing
Emergency Duration	2 hrs
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Electro-galvanised steel casing; epoxy powder coating
Flammability Class	Self-extinguishing
Weight	Module - 0.22 kg; Battery - 0.37 kg
Compliance	IEC 61347-2-7
Warranty	1 year

Ordering Information

MODEL	LAMP
FL 140M-EV58	Fluorescent Lamp