

# LED RECESSED EMERGENCY LIGHT





## LED-11NM




### Dimensions (mm)

#### Conversion Kit

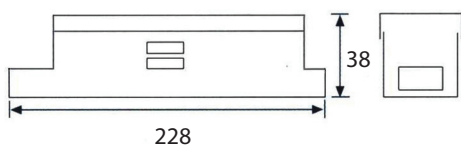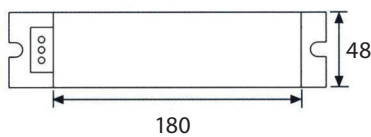


#### Recessed Mount



Small Disc  
Opening 62mm



Big Disc  
Opening 118mm



#### Surface Mount



## Features and Application

The LED-11NM Recessed Emergency Light is a miniature emergency system that is mounted flush on ceilings and blends seamlessly into various indoor environments including retail, office, hotels, etc. Surface mount is also available.



## Technical Data

Mode of Operation	Non-maintained
Lamp	1 x 1 watt High Flux LED
Operating Temperature	ta 40°C
Mains Supply	230V AC 50/60 Hz
Power Consumption	2VA
Battery	3.6V/1.25 AH Maintenance-free High Temperature NiMH
Charger	Fully automatic
Charging Monitor	Ø 5mm Green LED
Recharge Period	24 hrs
Testing Facility	Push-off Test-switch for independent testing
Emergency Duration	3 hrs
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Electro-galvanised steel casing; epoxy powder coating
Flammability Class	Self-extinguishing
Weight (Nett/Gross)	0.52 kg / 0.66 kg
Compliance	SS563; SS263 pt.2; IEC 61347-2-7; IEC 61347-2-13; IEC 61347-1; IEC 62384; IEC 62301; IEC 62471
Warranty	1 year

## Ordering Information

MODEL	LAMP
LED-11NM (Recessed mount c/w small/big disc)	1 x 1 watt High Flux LED Lamp
LED-11NM (Surface mount)	1 x 1 watt High Flux LED Lamp