

COMPACT EMERGENCY LIGHT

CEL 28NM





Features and Application

This is a corrosion resistant and self-contained emergency light of polycarbonate material. The unit is easily installed as there are no additional brackets required. The control gear mounting plate can be simply removed for ease of maintenance. The lamp is powered by a highly efficient pushpull inverter during interruption of main supply.



Dimensions (mm)

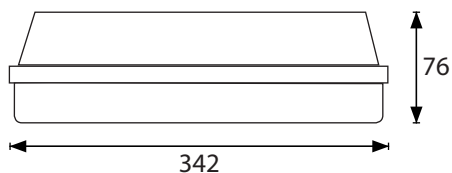

Technical Data

Mode of Operation	Non-maintained
Lamp	2 x 8 watt Fluorescent lamp
Operating Temperature	ta 40°C
Mains Supply	230V AC 50/60Hz
Power Consumption	3VA
Battery	Maintenance-free High Temperature Nickel Cadmium
Charger	Fully automatic
Charging Monitor	Ø 5mm Green LED
Recharge Period	24 hrs
Testing Facility	Push-off test-switch for independent testing
Emergency Duration	2 hrs
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Injection moulded fire retardant polycarbonate housing; clear reeded diffuser
Weight (Nett/Gross)	1.3 kg / 1.4 kg
Compliance	SS 263-2/A2:2008; SS 563-2/A:2013
Installation	Ceiling, wall or pendant mounting
Cable Entry	1 x 20mm Ø knockout hole
Warranty	1 year

Ordering Information

MODEL	LAMP
CEL 28NM	2 x 8 watt Fluorescent