

LED SURFACE MOUNT LUMINAIRE DENKO SUNLITE 18 SERIES



Features and Application

- Aesthetically pleasant, resilient and innovative product.
- The product provides simple energy-saving solutions for LED surface mount applications.
- The luminaire body is made of ABS base with PMMA diffuser to allow uniform illumination.
- Suitable for mounting on walls and staircase ceiling applications.




LUMINAIRE

Technical Data

Housing Material	ABS
Diffuser Material	PMMA Opal Polycarbonate
Light Source	LED SMD 2835
Mains Supply	230V AC, 50/60Hz
Wattage (Max)	18W (Max) / 4W (Dim down)
Lumens (lm)	1530lm (18W) / 416lm (5W)
Power Factor	≥0.80
Colour Temperature	2700K – 6500K
Colour Rendering	RA ≥80
Dimension	Ø 330 x 65 mm
IP Rating	IP 44

Dimensions (mm)

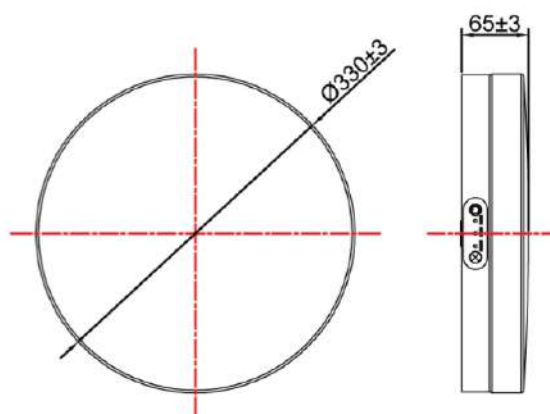

Ordering Information

MODEL	DESCRIPTION
DENKO SUNLITE 18	18W LED
With Emergency Power Pack	Add on suffix 'E' - i.e. DENKO SUNLITE 18E
With Motion Sensor	Add on suffix 'M' - i.e. DENKO SUNLITE 18M
With Powerpack and Motion Sensor	Add on suffix 'EM' - i.e. DENKO SUNLITE 18ME