

LED EMERGENCY CONVERSION KIT

LED1330-M



PLS Listed
Emergency
Power Pack



Class I

PSB Singapore

Features and Application

- Self-contained emergency conversion kit designed to strike various types of LED lamps.
- High efficiency conversion unit providing long backup duration.




EMERGENCY
CONVERSION KIT

Technical Data

Mode of Operation	Maintained
Lamp Compatibility	LED lamps
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50/60Hz, Protection against polarity reversal
Power Consumption	< 3W
Battery	High temperature NICD battery
Charger	Fully automatic
Charging Monitor	Ø 5mm green LED
Recharge Period	24 hrs
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Electro-galvanised steel casing with epoxy powder coating
Weight (Nett/ Gross)	Module - 0.25 kg / 0.35 kg Battery - 0.3 kg
Compliance	IEC 61347-2-7:2006; IEC 61347-2-13:2006; IEC 62384/A1:2009, SS 563-2:2010
Warranty	1 year

Dimensions (mm)

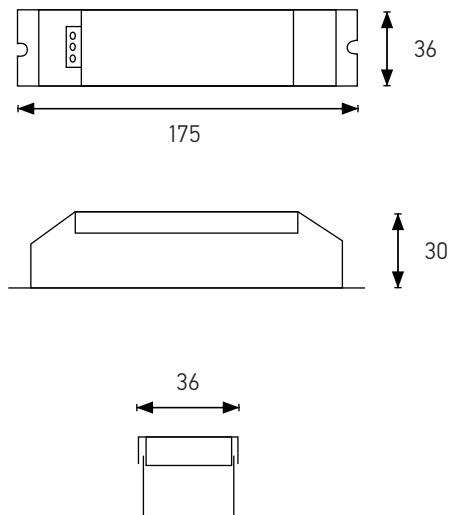

Ordering Information

MODEL	LAMP COMPATIBILITY
LED1330-M	LED lamps