

LED BOX EMERGENCY EXIT SIGN BLEX W2001M / RM SERIES



PLS Listed
Emergency
Exit Sign



PSB Singapore



Class I

Features and Application

- Self contained emergency exit sign encased in a slim box.
- Options for Exit or Running Man signage available.
- Suitable for installation on wall, ceiling or pendant mounting.
- LED lamps provide high efficiency, durability and low energy consumption.



BLEX W2001M




BLEX W2001RM

EXIT SIGN

Technical Data

Mode of Operation	Maintained
Lamp	2W Samsung High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50/60Hz
Power Consumption	< 4W
Battery	High temperature NICD battery
Charger	Fully automatic
Charging Monitor	Ø 5mm green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Electro-galvanised steel casing with epoxy powder coating
Weight (Nett/ Gross)	1.9 kg / 2.1 kg
Compliance	SS 563-1:2010; SS 563-2:2010/A1:2013; SS IEC 60598-2-22:2016
Installation	Ceiling, wall or pendant mounting
Cable Entry	4 x 20mm Ø knockout hole
Legend	White text/graphical symbol over ISO green background
IP Rating	IP20
Warranty	1 year

Dimensions (mm)

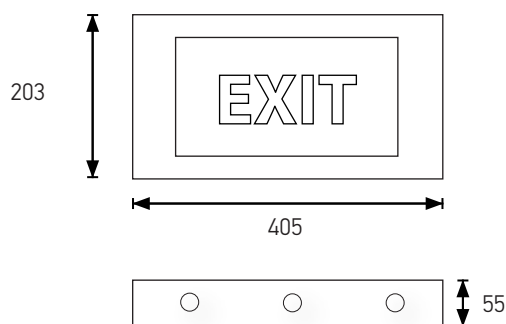

Single-sided/double-sided

Ordering Information

EXIT	LEGEND	RUNNING MAN	LEGEND
BLEX W2001M		BLEX W2001RM	
BLEX W2001M-E		BLEX W2001RM-E	
BLEX W2001M-T		BLEX W2001RM-T	
BLEX W2001M-D (Double-sided)	 	BLEX W2001RM-D (Double-sided)	