

WEATHERPROOF DECORATIVE LED TWIN-FLOOD EMERGENCY LIGHT

DL 2301NM WP



PSB Singapore

Features and Application

- Self-contained LED dual lamp emergency light.
- LED lamps provide high efficiency, durability and low energy consumption.
- Weatherproof version is housed in a IP65 rated polycarbonate capsule and certified by TÜV SÜD PSB, ideal for outdoor areas such as dusty, humid and corrosive environments including car parks, loading bays, workshops, laboratories and corridor areas.




EMERGENCY LIGHT

Technical Data

Mode of Operation	Non-maintained
Lamp	2 x 3W High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50Hz/60Hz
Power Consumption	< 2W
Battery	High temperature NICD battery
Charger	Fully automatic
Charging Monitor	Ø 5mm green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Casing - Injection moulded fire retardant polycarbonate Weatherproof capsule - Polycarbonate
Weight (Nett/ Gross)	1.7 kg / 2 kg
Compliance	SS 563-2/A1:2013; SS IEC 60598-2-22:2016 SS IEC 60598-1:2016
Installation	Wall or pendant mounting
Cable Entry	Standard 20mm Ø knockout hole
IP Rating	IP65 rated TÜV SÜD PSB certified
Warranty	1 year

Dimensions (mm)

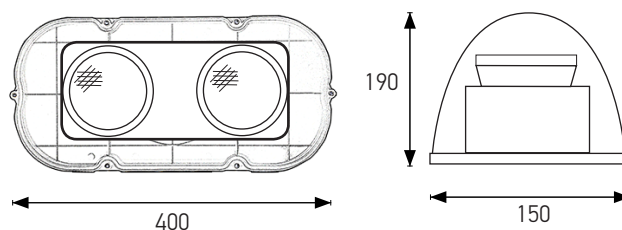

Ordering Information

MODEL	LAMP
DL 2301NM WP	3W High flux white LED