

NEW

LED AUXILIARY EMERGENCY LIGHT LED-13NM AUX



PLS Listed
Emergency
Lighting



PSB Singapore



Class I

Features and Application


- LED stand-alone self-contained emergency light solution for auxiliary installation with various types of light fittings.
- Easy installation with various types of light fittings.
- LED lamps provide high efficiency, durability and low energy consumption.



AUX GEM



AUX GEM 2



AUX STAR




EMERGENCY LIGHT

Technical Data

Mode of Operation	Non-maintained
Lamp	3W Samsung High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50Hz/60Hz
Power Consumption	< 2W
Battery	High temperature NIMH battery
Charger	Fully automatic
Charging Monitor	Ø 5mm green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Control gear - Electro-galvanised steel casing with epoxy powder coating AUX GEM 2 - Polycarbonate
Weight (Nett/ Gross)	Control gear - 0.24 kg / 0.29 kg
Compliance	SS 563-2/A1:2013; SS IEC 60598-2-22:2016 SS IEC 60598-1:2016
IP Rating	IP20
Warranty	1 year

Dimensions (mm)

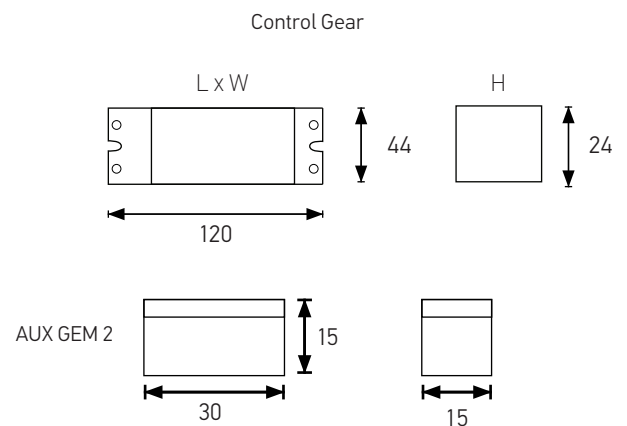

Ordering Information

MODEL	LAMP
LED-13NM AUX GEM2	3W Samsung High flux white LED