

LED SLIM BOX EMERGENCY EXIT SIGN

BLEX W2001M / RM SERIES



PLS Listed
Emergency
Exit Sign



PSB Singapore



Class 1

EXIT SIGN



BLEX W2001M



BLEX W2001RM


Features and Application

- Self contained emergency exit sign encased in a slim box.
- Options for Exit or Running Man signage available.
- Suitable for installation on wall, ceiling or pendant mounting.
- LED lamps provide high efficiency, durability and low energy consumption.

Technical Data

Mode of Operation	Maintained
Lamp	1W High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50/60Hz
Power Consumption	3VA
Battery	High temperature NIMH battery
Charger	Fully automatic
Charging Monitor	Ø 5mm green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Electro-galvanised steel casing with epoxy powder coating
Weight (Nett/Gross)	1.9 kg / 2.1 kg
Compliance	SS 563-1:2010; SS 563-2/A1:2013; SS 263-2 (IEC 60598-2-22) /A2:2008
Installation	Ceiling, wall or pendant mounting
Cable Entry	4 x 20mm Ø knockout hole
Legend	White text/graphical symbol over ISO green background
IP Rating	IP 20
Warranty	1 year

Dimensions (mm)

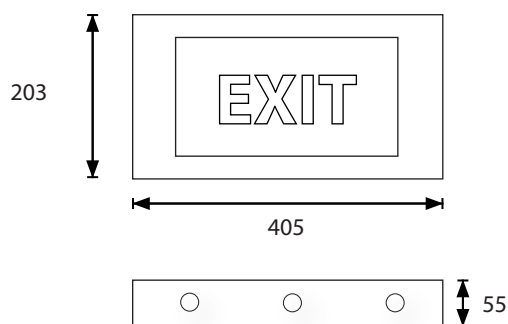

Single-sided/double-sided

Ordering Information

EXIT	LEGEND	RUNNING MAN	LEGEND
BLEX W2001M		BLEX W2001RM	
BLEX W2001M-E		BLEX W2001RM-E	
BLEX W2001M-T		BLEX W2001RM-T	
BLEX W2001M-D (Double-sided)	 	BLEX W2001RM-D (Double-sided)	