

WHITE LED SLIM EMERGENCY EXIT SIGN

SLED W1201M / RM SERIES



PLS Listed
Emergency
Exit Sign



PSB Singapore



Class 1

EXIT SIGN



SLED W1201M



SLED W1201RM Recessed

Features and Application

- LED emergency exit signs with option for Exit or Running Man signage.
- Optional recess plate and bracket available.
- LED lamps provide high efficiency, durability and low energy consumption.


Technical Data

Mode of Operation	Maintained
Lamp	1W High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50Hz/60Hz
Power Consumption	3VA
Battery	High temperature NIMH battery
Charger	Fully automatic
Charging Monitor	Ø 5mm green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Electro-galvanised steel casing with epoxy powder coating
Weight (Nett/Gross)	2.0 kg / 2.2 kg
Compliance	SS 563-1:2010; SS 563-2:2010; SS 263-2 (IEC 60598-2-22) /A2:2008
Installation	Ceiling, wall or pendant mounting
Cable Entry	3 x 20mm Ø knockout hole
IP Rating	IP 20
Legend	White text/graphical symbol over ISO green background
Warranty	1 year

Options

- Recessed panel and bracket

Dimensions (mm)

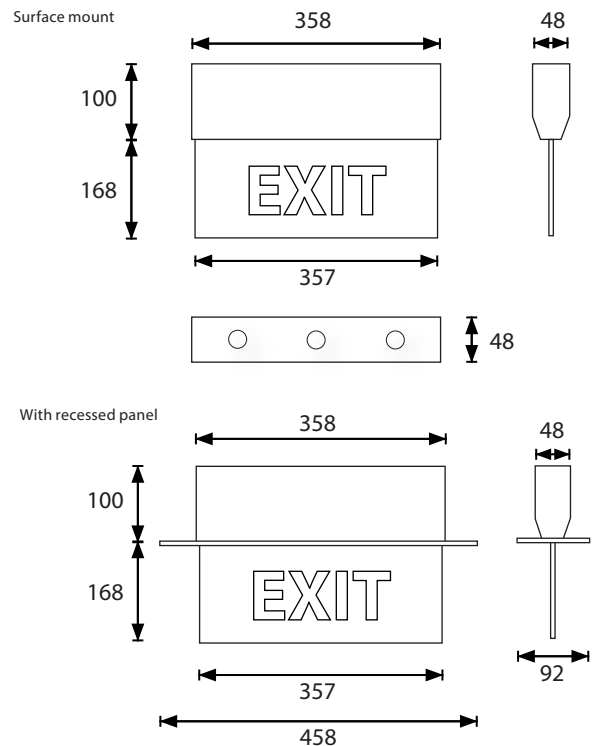

Ordering Information

EXIT	LEGEND	RUNNING MAN	LEGEND
SLED W1201M		SLED W1201RM	
SLED W1201M-E		SLED W1201RM-E	
SLED W1201M-T		SLED W1201RM-T	
SLED W1201M-D (Double-sided)	 	SLED W1201RM-D (Double-sided)	