

SLIM EMERGENCY EXIT SIGN

SSE 18M / RM SERIES



Features and Application

- Fluorescent emergency exit signs with option for Exit or Running Man signage.
- Optional recess plate and bracket available.
- Easy installation with wall, ceiling or pendant mounting options.



SSE 18M


SSE 18RM Recessed

EXIT SIGN

Technical Data

Mode of Operation	Maintained
Lamp	8W Fluorescent
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50Hz/60Hz
Power Consumption	12VA
Battery	High temperature NICD battery
Charger	Fully automatic
Charging Monitor	Ø 5mm green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	2 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Electro-galvanised steel casing with epoxy powder coating
Weight (Nett/Gross)	2.4 kg / 2.6 kg
Compliance	SS 563-1:2010; SS 563-2:2010; SS 263-2 (IEC 60598-2-22) /A2:2008
Installation	Ceiling, wall or pendant mounting
Cable Entry	3 x 20mm Ø knockout hole
IP Rating	IP 20
Legend	White text/graphical symbol over ISO green background
Warranty	1 year

Dimensions (mm)

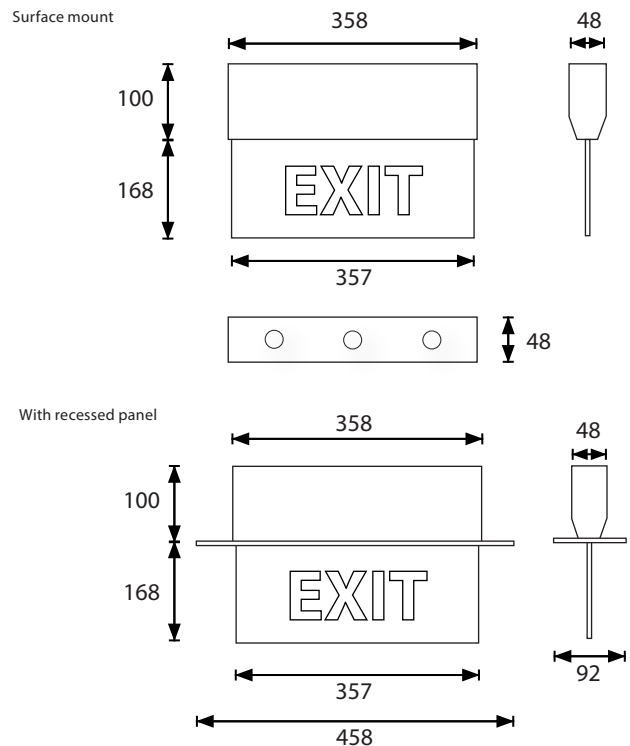

Ordering Information

EXIT	LEGEND	RUNNING MAN	LEGEND
SSE 18M		SSE 18RM	
SSE 18M-E		SSE 18RM-E	
SSE 18M-T		SSE 18RM-T	
SSE 18M-D (Double-sided)	 	SSE 18RM-D (Double-sided)	

Options

- Recessed panel and bracket