

**NEW**

# EASI LED SURFACE EMERGENCY LIGHT

## EmLED-14NM



### Features and Application

- New compact all-in-one, self-contained LED emergency light for recessed installation on ceilings designed for easy installation and usage.
- Includes a ring adapter.
- Suitable for various indoor environments such as retail, commercial, hospitality and healthcare industries.
- LED lamps provide high efficiency, durability and low energy consumption.




EmLED-14NM

EmLED-14NM with ring adapter

### Technical Data

Mode of Operation	Non-maintained
Lamp	Samsung 4W High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50Hz/60Hz
Power Consumption	< 2W
Battery	High temperature NIMH battery
Charger	Fully automatic
Charging Monitor	Green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Polycarbonate
Weight (Nett/Gross)	0.28 kg / 0.34 kg
Compliance	SS 563-2:2010/A1:2013 SS IEC 60598-2-22:2016 SS IEC 60598-1:2016
Installation	Recessed mount
IP Rating	IP 20
Warranty	1 year

### Dimensions (mm)

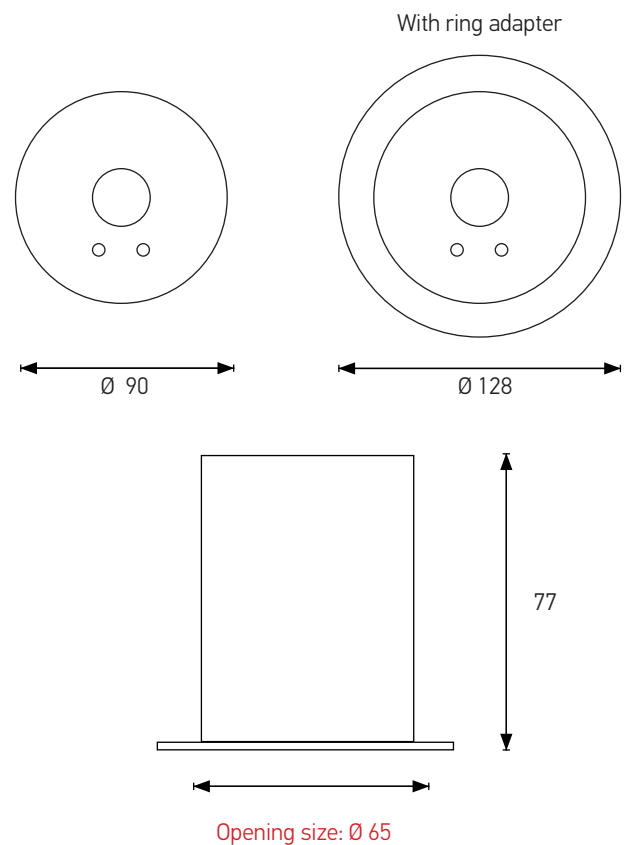

### Ordering Information

MODEL	LAMP
EmLED-14NM	Samsung 2W High flux white LED

EMERGENCY LIGHT

All information subject to change © Denko Lighting Pte Ltd 05/2018