

EmBER 2602M / RM Series

SLIM LED BOX EMERGENCY EXIT SIGN



Features and Benefits

- Self contained emergency exit sign encased in a slim box made of fire retardant polycarbonate.
- New design with thin bezels for a minimalist and modern aesthetic.
- Options for Exit or Running Man signage available.
- Suitable for installation on wall or ceiling.
- LED lamps provide high efficiency, durability and low energy consumption.



EmBER 2602M




EmBER 2602M-D



Technical Data

Mode of Operation	Maintained
Lamp	2W High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50/60Hz
Power Consumption	< 4W
Battery	High temperature Ni-Cd battery
Charger	Fully automatic
Charging Monitor	Ø 5mm green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Injection moulded fire retardant polycarbonate
Weight (Nett/Gross)	Single-sided: 0.74 kg / 0.94 kg Double-sided: 1.06 kg / 1.26 kg
Compliance	SS 563-1:2010 SS 563-2:2010/A1:2013 SS IEC 60598-2-22:2016
Installation	Ceiling or wall mounting
Cable Entry	5 x 20mm Ø knockout hole
IP Rating	IP30
Legend	White text/graphical symbol over ISO green background
Viewing Distance	30 m
Warranty	1 year

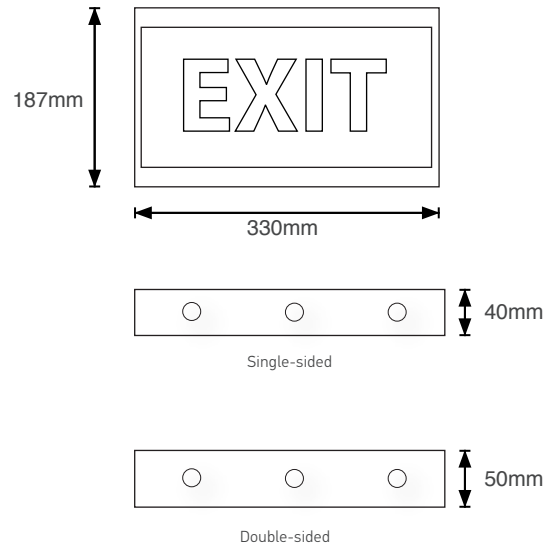

Ordering Information

EXIT	LEGEND	RUNNING MAN	LEGEND
EmBER 2602M		EmBER 2602RM	
EmBER 2602M-E		EmBER 2602RM-E	
EmBER 2602M-T		EmBER 2602RM-T	
EmBER 2602M-D (Double-sided)		EmBER 2602RM-D (Double-sided)	