

LED RECESSED BOX EMERGENCY EXIT SIGN

BLEX W2001M / RM RECESSED SERIES



Features and Application

- Self contained emergency exit sign specially designed for recessed wall mounting.
- Options for Exit or Running Man signage available.
- LED lamps provide high efficiency, durability and low energy consumption.




EXIT SIGN

Technical Data

Mode of Operation	Maintained
Lamp	1W High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50/60Hz
Power Consumption	3VA
Battery	High temperature NIMH battery
Charger	Fully automatic
Charging Monitor	Ø 5mm green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Electro-galvanised steel casing with epoxy powder coating
Weight (Nett/Gross)	2.5 kg / 2.7 kg
Compliance	SS 563-1:2010; SS 563-2/A1:2013; SS 263-2 (IEC 60598-2-22) /A2:2008
Installation	Recessed wall mounting
Cable Entry	4 x 20mm Ø knockout hole
Legend	White text/graphical symbol over ISO green background
IP Rating	IP 20
Warranty	1 year

Dimensions (mm)

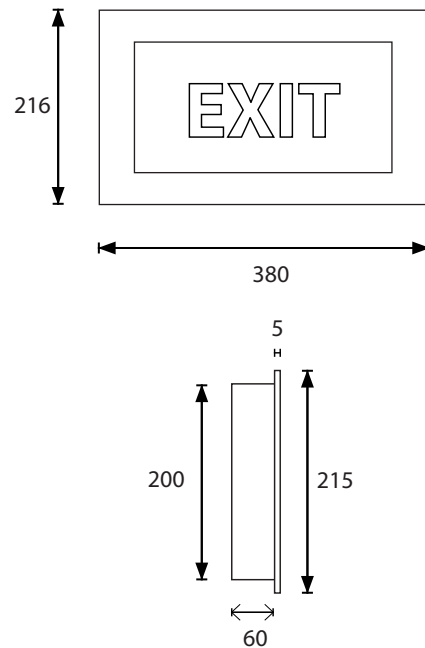

Ordering Information

EXIT	LEGEND	RUNNING MAN	LEGEND
BLEX W2001M Recessed		BLEX W2001RM Recessed	
BLEX W2001M-E Recessed		BLEX W2001RM-E Recessed	
BLEX W2001M-T Recessed		BLEX W2001RM-T Recessed	