

WLEX 100M / RM Series

WEATHERPROOF EMERGENCY EXIT SIGN


Features and Benefits

- IP65 weatherproof self contained emergency exit sign approved and certified by TÜV SÜD PSB.
- Options for Exit or Running Man signage available.
- Ideal for outdoor areas such as dusty, humid and corrosive environments including car parks, loading bays, workshops, laboratories and corridor areas.
- LED lamps provide high efficiency, durability and low energy consumption.



Technical Data

Mode of Operation	Maintained
Lamp	2W High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50/60Hz
Power Consumption	< 4W
Battery	High temperature Ni-Cd battery
Charger	Fully automatic
Charging Monitor	Ø 5mm green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Injection moulded fire retardant polycarbonate
Weight (Nett/Gross)	1.2 kg / 1.3 kg
Compliance	SS 563-1:2010 SS 563-2:2010/A1:2013 SS IEC 60598-2-22:2016
Installation	Wall or pendant mounting
IP Rating	IP65 rated TÜV SÜD PSB certified*
Legend	White text/graphical symbol over ISO green background
Viewing Distance	30 m
Warranty	1 year

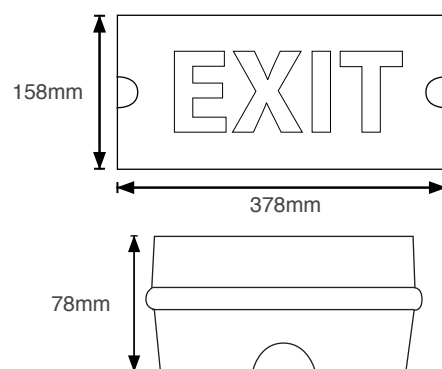

Ordering Information

EXIT	LEGEND	RUNNING MAN	LEGEND
WLEX 100M		WLEX 100RM	
WLEX 100M-E		WLEX 100RM-E	
WLEX 100M-T		WLEX 100RM-T	

Remarks

* For Weatherproof (IP65) installation, a cable gland (PG9 to PG13.5) is required for the AC incoming cable entry to ensure IP65 rating.